




MODEL	F6 620	F6 720	F6 920	F6 1120	F6 1320	F6 1520	F6 1720	F6 1920	F6 2120
Size in mm	Topplate: L: 620mm D: 215mm Bottom box: L: 600mm H: 160mm incl. topplate D: 190mm	Topplate: L: 720mm D: 215mm Bottom box: L: 700mm H: 160mm incl. topplate D: 190mm	Topplate: L: 920mm D: 215mm Bottom box: L: 900mm H: 160mm incl. topplate D: 190mm	Topplate: L: 1120mm D: 215mm Bottom box: L: 1100mm H: 160mm incl. topplate D: 190mm	Topplate: L: 1320mm D: 215mm Bottom box: L: 1300mm H: 160mm incl. topplate D: 190mm	Topplate: L: 1520mm D: 215mm Bottom box: L: 1500mm H: 160mm incl. topplate D: 190mm	Topplate: L: 1720mm D: 215mm Bottom box: L: 1700mm H: 160mm incl. topplate D: 190mm	Topplate: L: 1920mm D: 215mm Bottom box: L: 1900mm H: 160mm incl. topplate D: 190mm	Topplate: L: 2120mm D: 215mm Bottom box: L: 2100mm H: 160mm incl. topplate D: 190mm
Flame tray size, mm	400	500	700	900	1100	1300	1500	1700	1900
Capacity, liters	3.8L	4L	5.8L	7.2L	8.4L	9.7L	11.1L	12.4L	13.7L
Burning time at max flame	8.0h	7.0h	7.5h	7.3h	7.0h	6.5h	6.5h	6.5h	6.5h
Nominal output, kWh	2.6	3.2	4.3	5.7	7.0	8.3	9.6	10.8	12.1
Net weight, kg	13	15	19	21	23	25	27	29	31
Min. room size, m ³	51	64	89	115	140	166	191	217	243

GENEREL INFORMATION

Produced in	Denmark
Flame levels	5 flamelevels + ECO Wave
Sensors	Temperature/Fuel Level/Spillage
Powersupply	230 V
Fuel Type	Bioethanol 95 - 96.5 %
Flue	Not required
No internal pump	No noise, reduced maintenance, increased reliability
Finish	Black powder-coating
Finish top-plate	2mm black powder-coated steel
Glass	Tempered glass, T6mm H70mm The glass is placed in customised glassholders
Application	Indoor use only

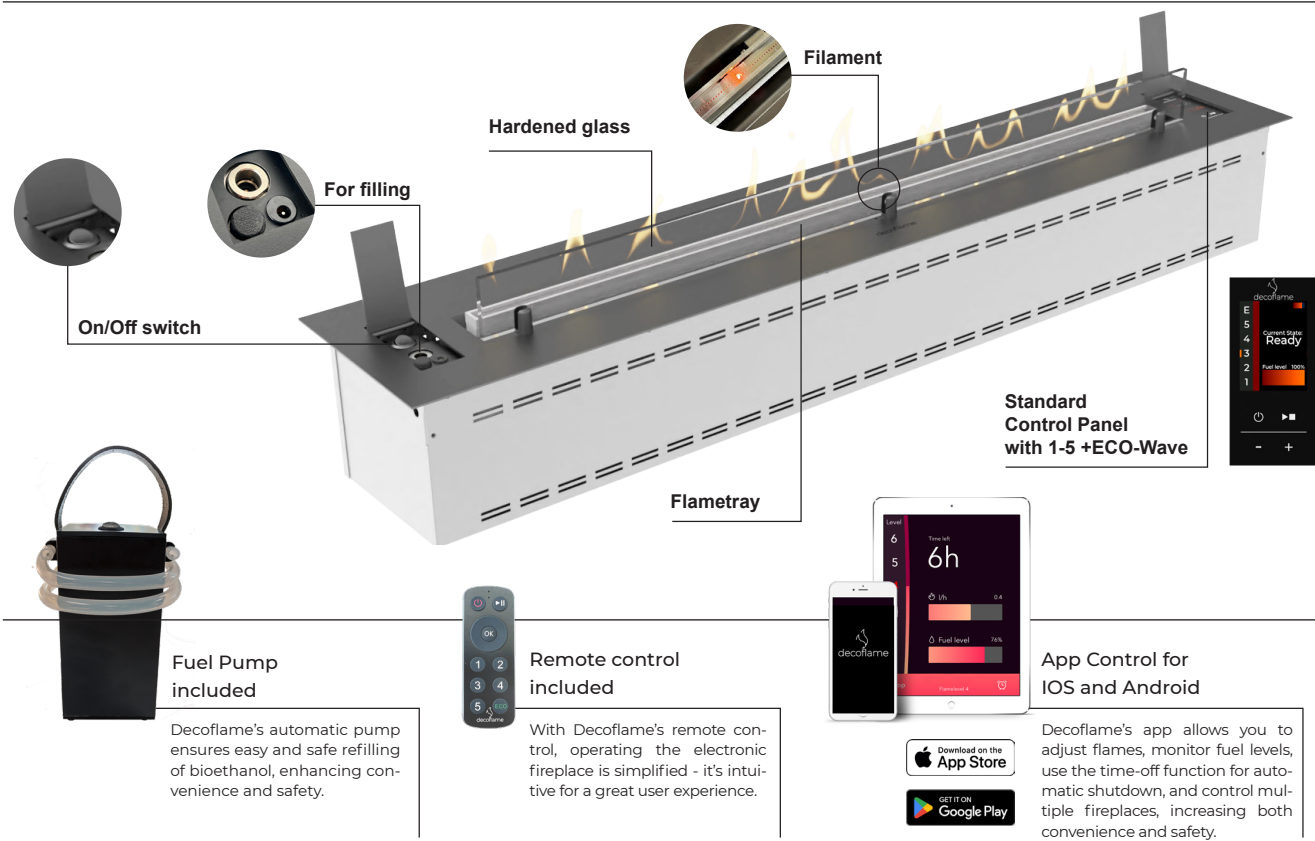


BIOETHANOL


For use and information about bioethanol, please visit: decoflame.com.
Please be aware that bioethanol is essential to a proper use and guarantee of your product.

Subject to typing errors, typos and technical faults, production- and product tolerances.
Decoflame ApS reserves the right to make changes without notice. We refer to Decoflame's Ordinary Terms and Conditions.


DENVER F6 CAN BE INSTALLED IN
VARIOUS CONSTRUCTION OPTIONS. EG:

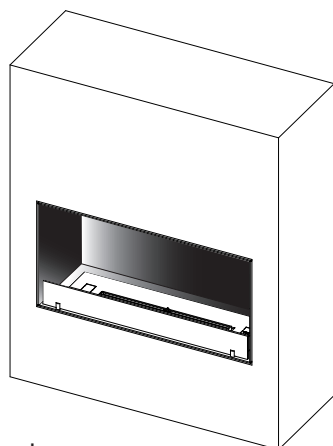


Open to front

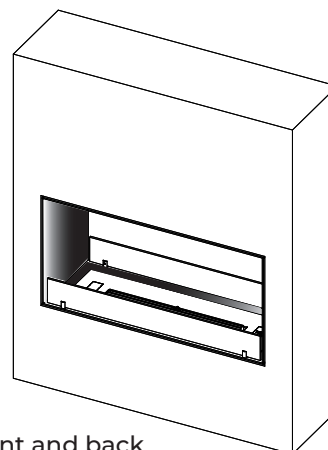


Open to front and back

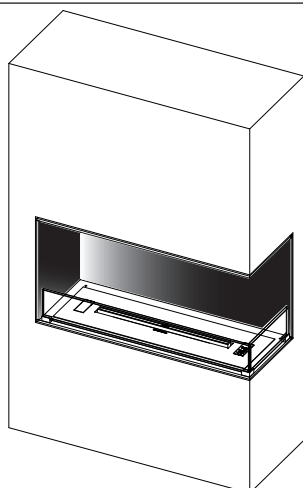


Open to front and 1 side (Left or right)

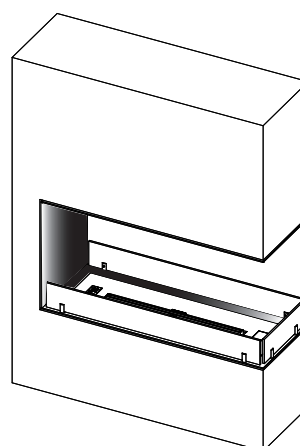


Open to front, back and 1 side (Left or right)



Single standing

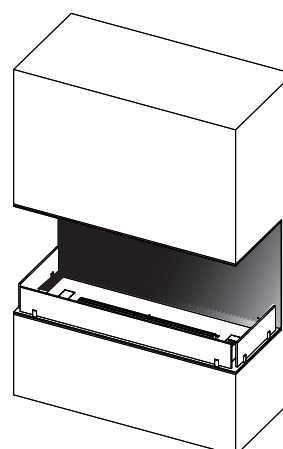

Open to front and 2 sides

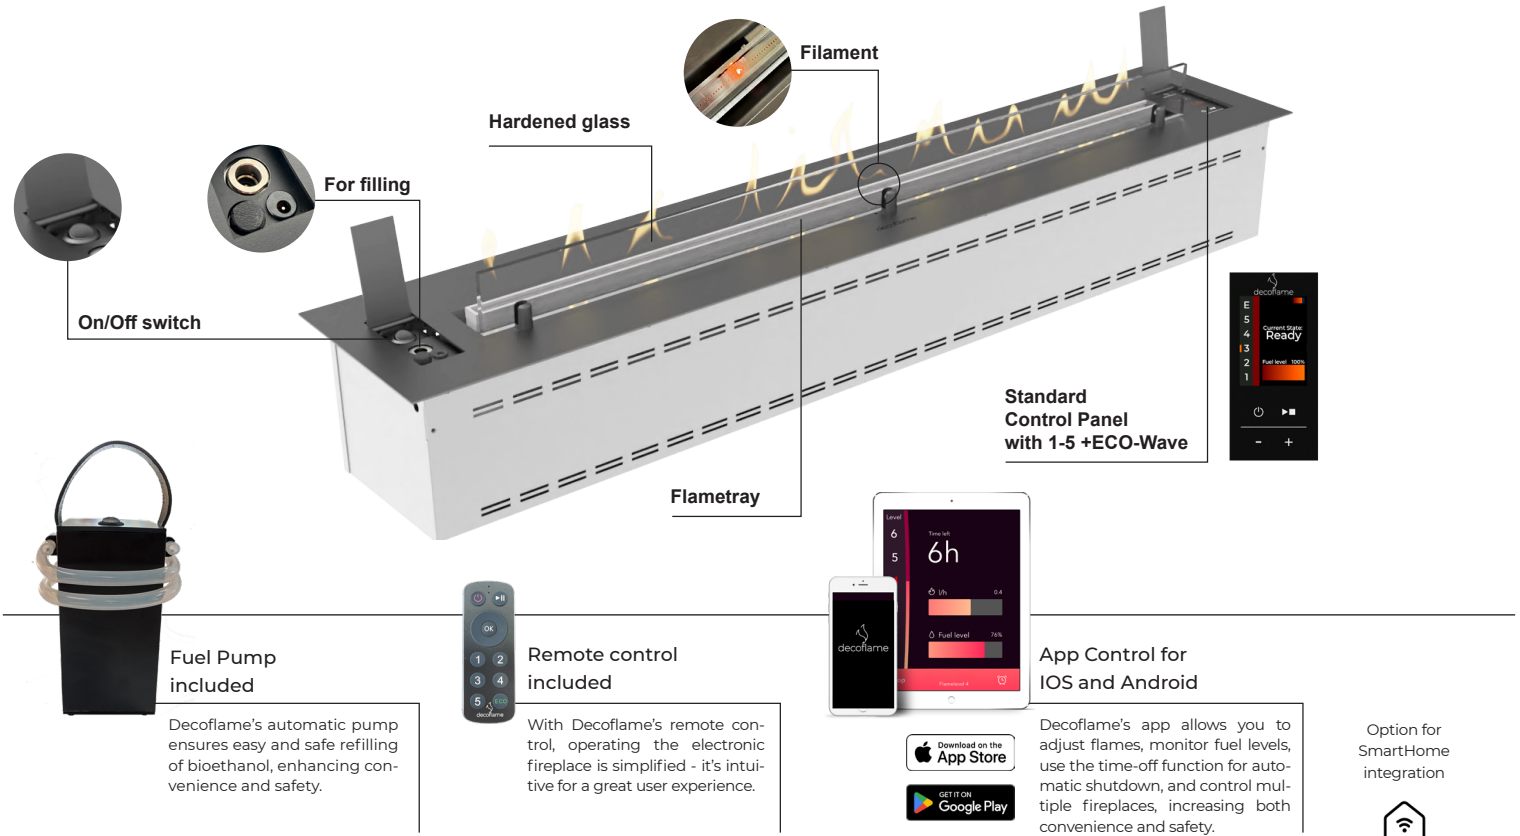

MODEL	F6 2320	F6 2520	F6 2720	F6 2920	F6 3120	F6 3320	F6 3520	F6 3720	F6 3920
Size in mm	Topplate: L: 2320mm D: 215mm Bottom box: L: 2300mm H: 160mm incl. topplate D: 190mm	Topplate: L: 2520mm D: 215mm Bottom box: L: 2500mm H: 160mm incl. topplate D: 190mm	Topplate: L: 2720mm D: 215mm Bottom box: L: 2700mm H: 160mm incl. topplate D: 190mm	Topplate: L: 2920mm D: 215mm Bottom box: L: 2900mm H: 160mm incl. topplate D: 190mm	Topplate: L: 3120mm D: 215mm Bottom box: L: 3100mm H: 160mm incl. topplate D: 190mm	Topplate: L: 3320mm D: 215mm Bottom box: L: 3300mm H: 160mm incl. topplate D: 190mm	Topplate: L: 3520mm D: 215mm Bottom box: L: 3500mm H: 160mm incl. topplate D: 190mm	Topplate: L: 3720mm D: 215mm Bottom box: L: 3700mm H: 160mm incl. topplate D: 190mm	Topplate: L: 3920mm D: 215mm Bottom box: L: 3900mm H: 160mm incl. topplate D: 190mm
Flame tray size, mm	2100	2300	2500	2700	2900	3100	3300	3500	3700
Capacity, liters	15L	16.4L	17.7L	19L	20.3L	21.6	23L	24.3L	25.6L
Burning time at max flame	6.5h	6.5h	6.5h	6.5h	6.5h	6.5h	6.5h	6.5h	6.5h
Nominal output, kWh	13.4	14.7	16.0	17.2	18.5	19.4	21.1	23.3	23.6
Net weight, kg	33	35	37	39	41	43	45	47	49
Min. room size, m ²	268	293	319	344	370	395	421	447	472

GENEREL INFORMATION

Produced in	Denmark
Flame levels	5 flamelevels + ECO Wave
Sensors	Temperature/Fuel Level/Spillage
Powersupply	230 V
Fuel Type	Bioethanol 95 - 96.5 %
Flue	Not required
No internal pump	No noise, reduced maintenance, increased reliability
Finish	Black powder-coating
Finish top-plate	2mm black powder-coated steel
Glass	Tempered glass, T6mm H70mm The glass is placed in customised glassholders
Application	Indoor use only



BIOETHANOL


For use and information about bioethanol, please visit: decoflame.com.

Please be aware that bioethanol is essential to a proper use and guarantee of your product.


Subject to typing errors, typos and technical faults, production- and product tolerances.

Decoflame ApS reserves the right to make changes without notice. We refer to Decoflame's Ordinary Terms and Conditions.


DENVER F6 CAN BE INSTALLED IN
VARIOUS CONSTRUCTION OPTIONS. EG:

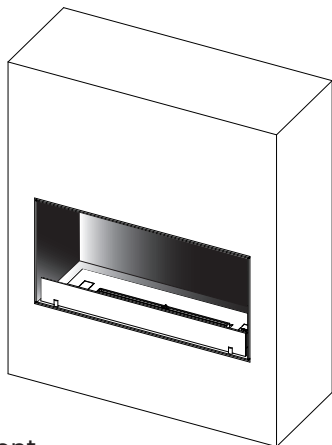


Open to front

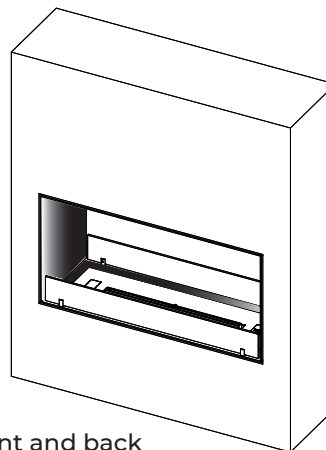


Open to front and back

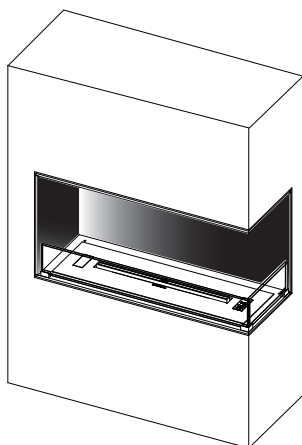


Open to front and 1 side (Left or right)

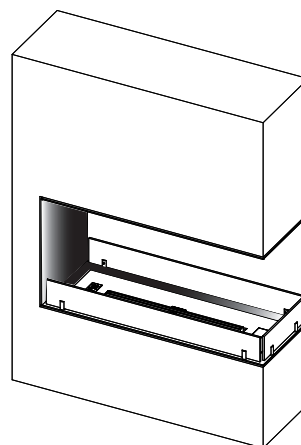

Open to front, back and 1 side (Left or right)



Single standing

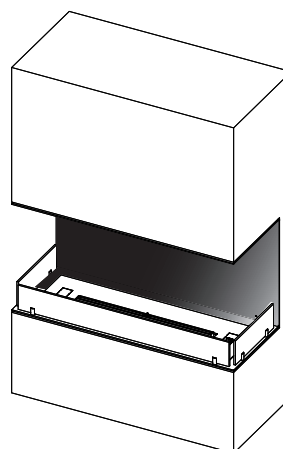

Open to front and 2 sides