


## TECHNICAL SPECIFICATIONS

# HAIKU I

ICONIC DESIGN, INCREDIBLE PERFORMANCE




### Low Profile Mount

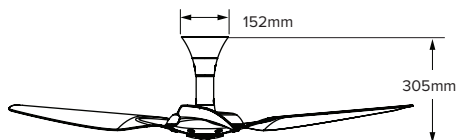

Flat ceilings as low as 2.4m

### Universal Mount

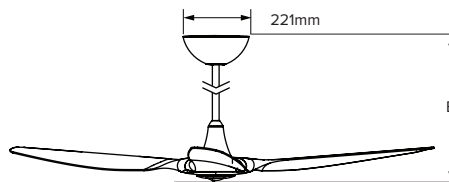

Flat or sloped ceilings from 2.7–5.5m

### Universal Mount Downrod Lengths

Downrod (A) <sup>1</sup>	Included	Optional				
	305mm	178mm	508mm	813mm	1219mm	1524mm
Fan Height (B) <sup>2</sup>	533mm	406mm	737mm	1041mm	1448mm	1753mm
Ceiling Height	2.7–3.2m	2.7–2.9m	3.2–3.4m	3.4–4m	4–4.3m	>4.3m

### Construction Features

Aerofoils	Motor <sup>3</sup>	Controls <sup>4</sup>	Onboard Sensors <sup>4</sup>	Mounting	Environment	Accessories
Matrix composite	High-efficiency, brushless DC/EC motor Fan Eco	Handheld remote Haiku mobile app 0–10 V (optional with universal mount)	Temperature, humidity, and motion sensors enable SenseME Technology	Flat or sloped ceilings 2.4 metres or taller	Indoor or covered outdoor use	Haiku Light Kit 0–10 V Module Optional extension tube lengths and a Stabiliser Kit are available for ceilings over 4.3 metres (special order)

### Technical Specifications

Diameter	Mount	Weight <sup>5</sup>	Max Speed	Watts Min/Max	Operating Voltage	Ambient Operational Temperature	Sound Level <sup>6</sup>
1321mm	Low Profile	6.4 kg	177 RPM	2.4 / 23.9 W	100–240 VAC, 1 Φ, 50–60 Hz	0° to 40° C	<35 dba at max speed
	Universal	5.9 kg	200 RPM	2.5 / 31.1 W			
1524mm	Low Profile	7.3 kg	177 RPM	1.9 / 21.5 W			
	Universal	6.8 kg	200 RPM	1.9 / 31.3 W			

### Haiku Light Kit



### Handheld Remote




Handheld remote




Remote with mount

### Aerofoil Finishes



Black



White

<sup>1</sup> Optional downrod lengths packaged separately.

<sup>2</sup> Fan heights do not include the Haiku Light kit.

<sup>3</sup> Activate Fan Eco to fully leverage the energy savings from your ceiling fan. Use the Haiku mobile app to enable Fan Eco.

<sup>4</sup> SenseME Technology and the Haiku mobile app are supported by Android<sup>®</sup> and iOS<sup>®</sup>.

<sup>5</sup> The precise fan weight will vary based on individual component weights and finishing.

<sup>6</sup> Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions.



Lead times may vary.  
Warranty period and terms vary by country and application.